




55RC

MODEL: T(4)DW-55RC-1-T1-(EC3/1)

HYDRAULIC DETACHABLE GOOSENECK TRAILER

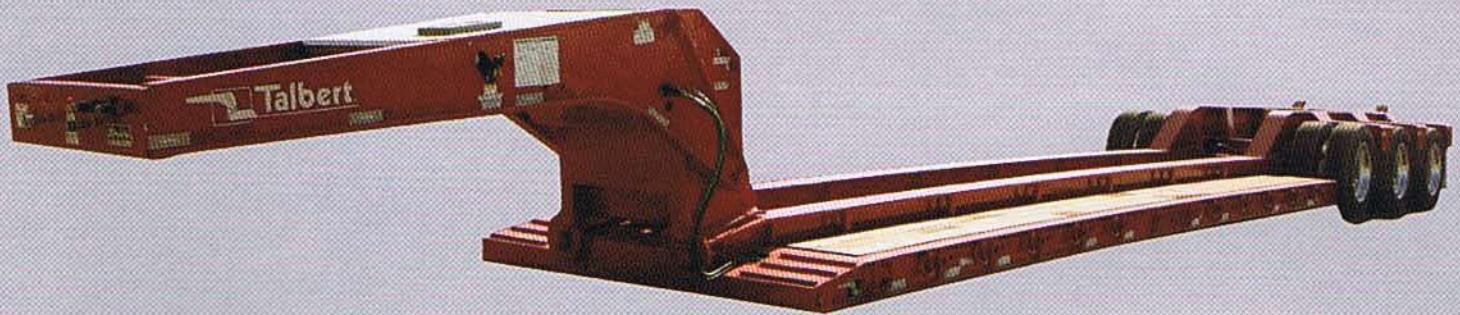

ALUMINUM GOOSENECK COVER PLATE
(STANDARD)


*Your
Transport
Advantage*



AXLE ATTACHMENT EQUALIZER SYSTEM
(OPTIONAL)



MODEL: T(4)DW-55RC-HRG-1-T1-(EC3/1)

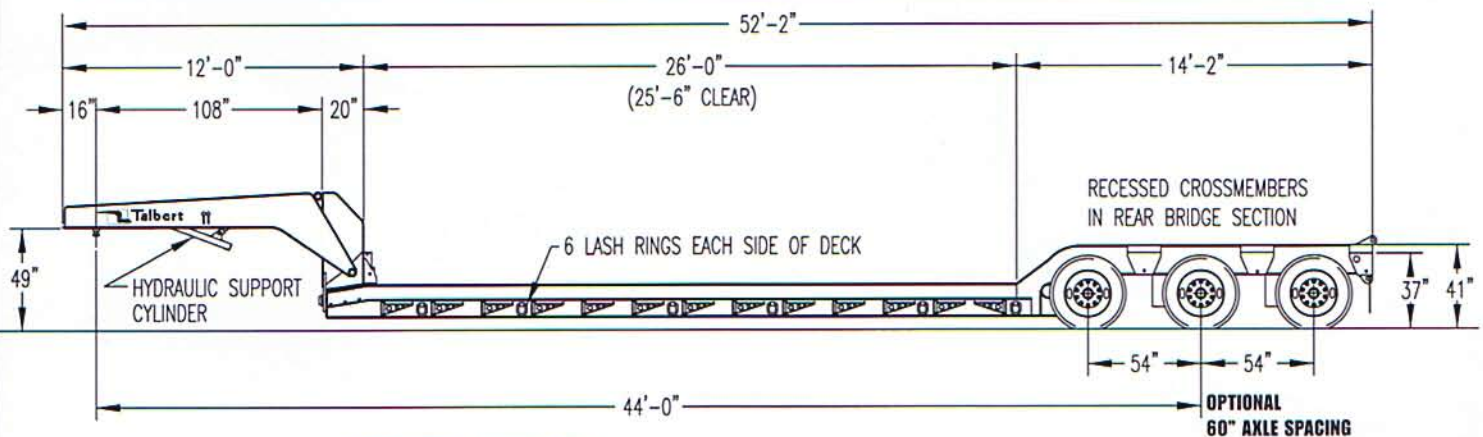

SPECIFICATIONS

Dealer

- NON-GROUND BEARING HYDRAULIC GOOSENECK DESIGN
- 108" SWING RADIUS (OTHER LENGTHS OPTIONAL)
- HYDRAULIC SUPPORT CYLINDER (STANDARD)
- FRONT FOLDING RAMPS (OPTIONAL)
- 26'-0" DECK LENGTH (OTHER LENGTHS OPTIONAL)
- 12" SWINGING OUTRIGGERS (NOT REMOVABLE)
- 8'-6" WIDE DECK (48" OUT TO OUT MAINBEAMS)
- 22" MAINBEAMS, 15" LOADED SIDE HEIGHT
- 6" LOADED ROAD CLEARANCE
- 2" APITONG FLOORING
- HIGH STRENGTH 100,000 P.S.I. MIN. YIELD STEEL
- AXLES: 25,000# CAPACITY
- SUSPENSION: AIR RIDE WITH AUTOMATIC & MANUAL CONTROLS
- TIRES: 275/70R22.5 (H)
- WHEELS: STEEL DISC, HUB PILOTED WITH OUTBOARD BRAKE DRUMS
- BOLSTERS AND HALF BOLSTER ON REAR BRIDGE
- 41" MAINBEAM / 37" BOLSTER HEIGHT
- BOOM WELL IN REAR BRIDGE
- SPRING PARKING BRAKE ON AXLE TWO
- 12 VOLT L.E.D. SEALED LIGHT SYSTEM
- 4TH AXLE AND 3+1 SPREAD CAPABLE
- 110,000# CAPACITY IN A 13'-0" LOAD BASE
- ESTIMATED WEIGHT 21,960#



NOTE: ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. ALL WEIGHTS AND DIMENSIONS APPROXIMATE. SHOWN IN A FULLY LOADED POSITION. PLATFORM HEIGHTS WILL INCREASE IF LOADED AT LESS THAN FULL CAPACITY.

Talbert Manufacturing, Inc.
 1628 W. State Road 114
 Rensselaer, IN 47978
 800-348-5232, Fax 219-866-7060
www.talbertmfg.com
 Bulletin #221A